



## CONCESSION BUILDINGS

### SIMPLE TO INSTALL

CXT® buildings require minimal site preparation and can typically be in use on the day of installation.

### READY TO USE

Our buildings are prefabricated and delivered complete and ready to use, including plumbing and electrical where applicable.

### EASY TO MAINTAIN

Our interiors are designed to resist abusive wear and can be cleaned quickly with warm soapy water and a brush.



KEYSTONE



POMONA



MALIBU



FONTANA



*Engineered to withstand snow, wind, flood, and zone-4 seismic loads.*

## UTILITIES

- Pre-wired, pre-plumbed, and tested before shipping to meet local code requirements.
- Concealed within the chase/storage area for easy hook up and maintenance, and to reduce vandalism.

## HOOK UP AND INSTALLATION

- Minimal site work is required.
- Water, sewage and electrical utility lines are stubbed up through the prepared base material to match up with the utility blockout within the floor of the chase area.
- Hookup of the three utility lines can be completed in a matter of hours.



- Vandal resistant building and toilet components
- 4" thick steel reinforced concrete walls
- 5" thick steel reinforced concrete roof and floors
- Will not rot, rust or burn
- Available in 28 different colors
- Custom textures and colors also available



Precast Roof Slab

#3 Reinforcing  
Perimeter Bar

4x4xWBxWB Welded  
Wire Fabric

3/8" Studded Steel  
Weld Plates


5000 PSI Concrete

Precast Exterior  
Wall Panel


Precast Floor Slab




Keystone

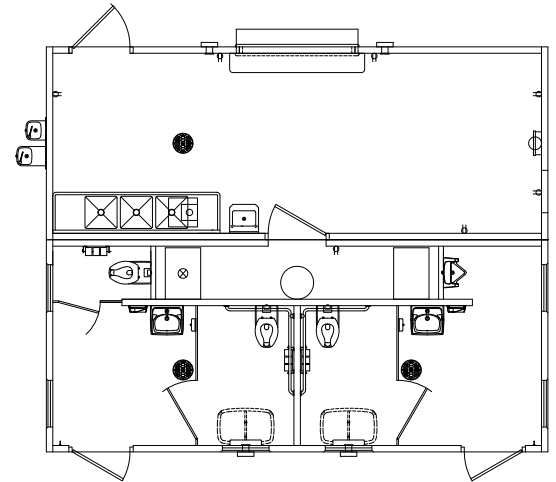


Malibu

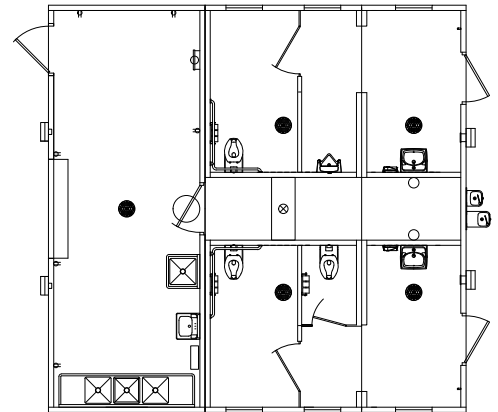

Pomona

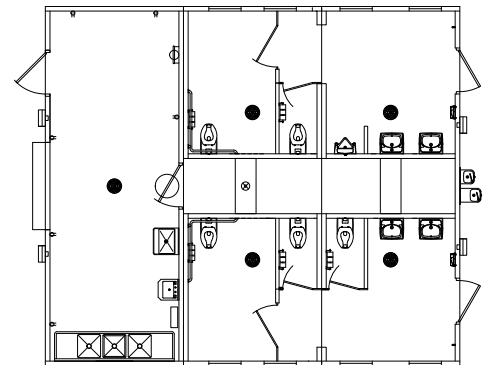

Fontana

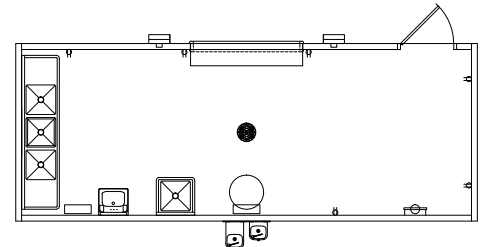

Floor plans for reference only.



www.cxtinc.com ▪ 800.696.5766

© 2021 CXT Incorporated All rights reserved. CXT Incorporated is a wholly owned subsidiary of L.B. Foster Company.

