

## BELOW FLOOR PIPING - KEY NOTES


- 1. 4" CLEAN DUT TO GRADE.
- 2, 2" FLOOR DRAIN WITH FIELD INSTALLED TRAP PRIMER SYSTEM IF REQUIRED BY AUTHORITY HAVING JURISDICTION. (10"DIA BLOCKOUT)
- 3. 2" VENT PIPES EXTENDED 12" ABOVE FINISHED FLOOR LEVEL, PROVIDE TEST PLUG. (1'-6"  $\times$  4'-0" BLOCKOUT)
- 4. 4" WASTE PIPE EXTENDED 12" ABOVE FINISHED FLOOR LEVEL, PROVIDE TEST PLUG. (1'-6"  $\times$  4'-0" BLOCKOUT)
- 5. 2" TYPE K ANNEALED "SOFT" COPPER WATER SERVICE EXTENDED 12" ABOVE FINISHED FLOOR LEVEL, PROVIDE CAP AT END. (6" x 2'-0" BLOCKOUT)
- 6.30" MIN. BURY, PROVIDE TRACER TAPE.
- 7. 4'-6" MIN. BURY.
- 8. ELECTRICAL STUB UP. (6"DIA BLOCKOUT)
- 9. 2" VENT PIPES EXTENDED 12" ABOVE FINISHED FLOOR LEVEL, PROVIDE TEST PLUG. (6" x 2'-0" BLOCKOUT)
- 10.2" FLOOR DRAIN WITH FIELD INSTALLED TRAP PRIMER SYSTEM IF REQUIRED BY AUTHORITY HAVING JURISDICTION. (1'-6" x 4'-0" BLOCKOUT)


## PIPING LEGEND

BELOW FLOOR WASTE / VENT PIPING SCH 40 ABS

2" TYPE "K" ANNEALED "SOFT" COPPER WATER SERVICE

THIS DRAWING IS SUPPLIED FOR REFERENCE ONLY, PLEASE CONTACT CXT ENGINEERING DEPARTMENT FOR BUILDING SPECIFIC CONTROLLED DOCUMENTS PRIOR TO ANY FIELD WORK.

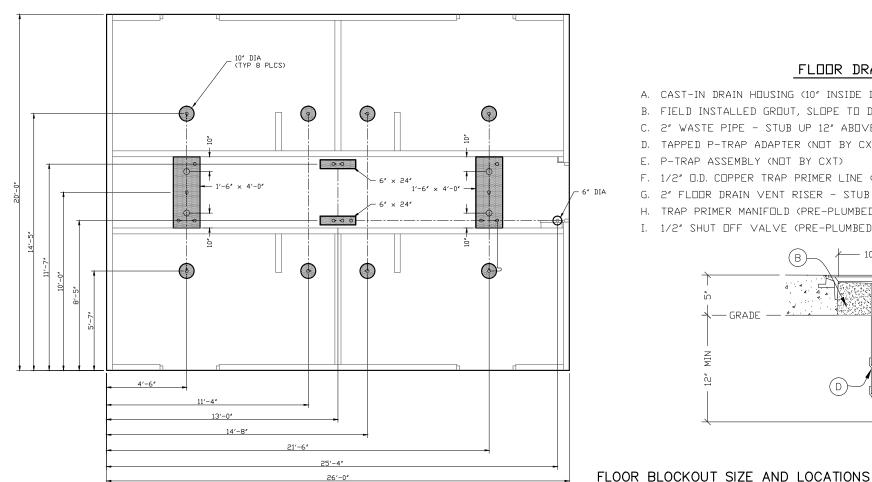


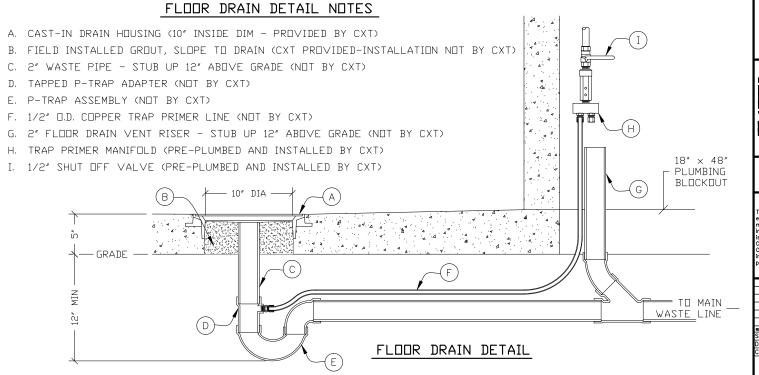



901 N. Highway 77 Hillsboro, TX 76645

NAVAJO FLUSH / SHOWER CXT STANDARD BUILDING



& BELOW FLOOR PIPING

N - 27